

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011475 A1

(51) International Patent Classification⁷: **C07F 9/38**,
C08G 73/04, C02F 5/14

(IT). **VALLE, Jean, Claude** [IT/IT]; Via V. Gasparini, 13,
I-24100 Bergamo (IT).

(21) International Application Number:
PCT/IT2003/000420

(74) **Agent: CIONI, Carlo**; Studio Cioni & Pipparelli, Viale
Caldara, 38, I-20122 Milan (IT).

(22) International Filing Date: 3 July 2003 (03.07.2003)

(81) **Designated States (national)**: AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) **Priority Data**:
MI2002A001706 31 July 2002 (31.07.2002) IT

(84) **Designated States (regional)**: ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) **Applicant (for all designated States except US): GIO-**
VANNI BOZZETTO S.p.A. [IT/IT]; Via Provinciale, 12,
I-24040 Filargo (IT).

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only): PALADINI, Mas-**
simo [IT/IT]; Via A. Ghislanzoni, 37, I-24100 Bergamo
(IT). **SPINI, Francesco** [IT/IT]; Via Castello Presati, 22,
I-24100 Bergamo (IT). **SCALVEDI, Alessandro** [IT/IT];
Via Donizetti, 17, I-24011 Alme (IT). **TARALLO,**
Daniele [IT/IT]; Via Primo Maggio, 5, I-20090 Segrate

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

WO 2004/011475 A1

(54) **Title:** POLYAMINOMETHYLENEPHOS PHONATE DERIVATIVES

(57) **Abstract:** A new class of polyaminophosphonate derivatives usable as inhibitors of precipitation and dispersants in aqueous systems. The products in object have complete tolerance of calcium and can be employed in severe conditions of use in the water treatment and detergent fields.

«POLYAMINOMETHYLENEPHOSPHONATE DERIVATIVES»

* * *

The present invention relates to a new class of phosphonates and related salts, the method of preparation of the same and their utilization in the preparation of water additives to be used in different industrial fields. More particularly, the present invention relates to the preparation of products that impart to the water the particular characteristics needed for its utilisation. More specifically, the products and the processes according to the present invention make available new additives that prevent the segregation of solids from their aqueous solutions or dispersions acting as precipitation inhibitors and dispersants.

The present invention will be here described with particular reference to the preparation and to the use of the products and processes for the preparation and the stabilization of aqueous dispersions, even though its scope should not be limited to those possible applications of the invention described above.


It is known that water found in the natural state (apart from rainwater) in the form of rivers, lakes and seas contains a certain quantity of metal ions and anions of different types in various proportions, depending on their origins; such metal ions can lead to the formation of a precipitate when water taken from a natural environment is used for industrial purposes. In this conditions, water which is normally in equilibrium with the external environment is affected by different physical-chemical conditions and if the concentration of salts in these

new conditions exceeds the solubility product (supersaturation) their precipitation is observed during the utilisation.

Salts showing this phenomenon are generally formed by earth-alkali metals (Ca; Ba; Mg); among them Calcium -- mostly as carbonate but also as sulfate -- is the main responsible for the phenomena of incrustation in several industrial water applications.

The incrustation (not only limited to poorly soluble salts) is generally called " SCALE " by water treatment experts.

Several factors are responsible for "supersaturation" and thus for the precipitation of aqueous solutions containing calcium carbonate. The CaCO_3 / CO_2 / H_2O system is described schematically here:

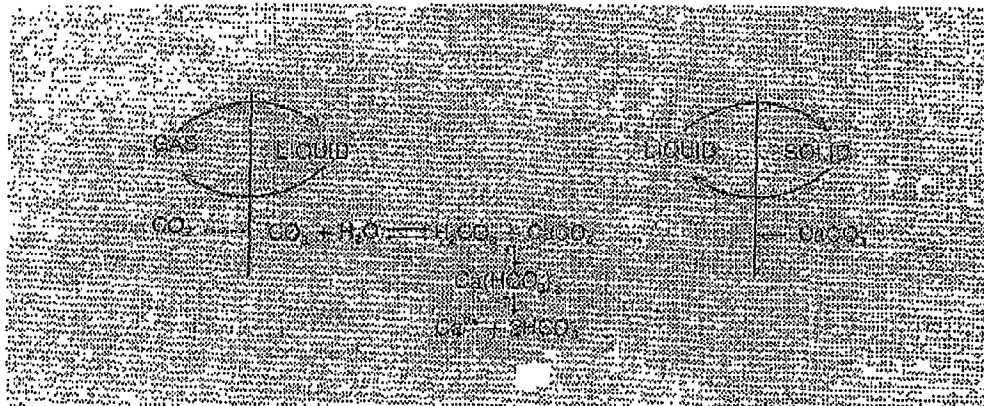

Calcium is present in all surface waters in the form of soluble bicarbonate (HCO_3^-) because of the absorption of carbon dioxide from the atmosphere. Any modification of such a system leads, in a more or less marked way, to precipitation of the CaCO_3 .

The causes are different and can be classified as follows:

1. Concentration of the solution (evaporation of the aqueous phase);

2. Variation of the temperature. By heating, the following transformation $\text{Ca}(\text{HCO}_3)_2$ $\text{CaCO}_3 + \text{CO}_2 + \text{H}_2\text{O}$ takes place.

3. Variations of the pH. An increase of the pH of the system results in the following transformation:



As far as cooling and/or heat-exchanger circuits is concerned, the incrustation (scale) formation mechanism can be attributed to precipitation of salts from supersaturated solutions in the region adjacent to the heat exchange surface of the system.

The effects of such uncontrolled precipitation are sometimes disastrous. For example, in cooling systems, where large volumes of water are used, the deposits of CaCO_3 accumulate in big quantity in the pipes causing reduction of the thermal exchange capacity and leading to virtual occlusion of the pipes making necessary the removal of the deposits by acidic treatment with consequent shutdown of the plant. Moreover, the formation of CaCO_3 incrustation facilitates the incorporation of solid particles that cannot be chemically removed (e.g. SiO_2) or the growth of bacteria and algae.

In order to overcome these disadvantages, pretreatments have been proposed:

they provide for the preventive elimination of low-solubility salts by ionic exchange, precipitation, or by the use of suitable "sequestering agents" and suitable "scale inhibitors".

Preventive elimination is in most cases not economically acceptable because of the large volumes of water involved.

The same can be said for the chelating agents; it is well known that these substances form water-soluble complexes with the metal ions, in a well defined stoichiometric molar ratio.

The preferred treatment today involves for the use of suitable "scale inhibitors" using the so

called "Threshold Effect". The Threshold Effect was discovered by observing the behaviour of inorganic polyphosphates that prevent the precipitation of the CaCO_3 from supersaturated solutions by means of sub-stoichiometric concentrations (Hatch and Rice, Indust. Eng. Chem., 31,51-53 (1939); Reitemeier and Buehrer, J.Phys. Chem., 44 (5), 535-536 (1940); Fink and Richardson U.S. Pat. No. 2,358,222; and Hatch, U.S. Pat. No. 2,539,305).

The mechanism by which the precipitation is inhibited is not completely understood today, although the adsorption of inhibitor onto the crystalline surface seems necessarily to be the first step in the inhibition process. The molecules of inhibitor are attracted on the growing crystalline surface by the presence of metal cations such as Ca, Mg, Ba for which they have a great affinity.


Once the molecules of inhibitor are adsorbed, they locate on the surface of the crystal, thus disturbing the regularity of its growth.

If all this happens in the "nucleation" phase, i.e. in the stage in which a certain number of molecules in solution begin to aggregate in order to give rise to a crystal nucleus, the inhibitor can disturb nuclear growth to such an extent as to make the nucleus redissolve.

Such ability, exercised by various polyelectrolytes, is particularly marked in the case of phosphonates, which moreover combine corrosion inhibition functions with great resistance to hydrolysis.

However, for every operating condition there is a limit to the molar ratio between inhibitor and metal. In fact, by increasing the phosphonate quantity beyond a certain limit, precipitation of insoluble calcium salts of phosphonates is observed; in such "turbidity" zone, the phosphonate is no longer active. The effectiveness of the phosphonates at various inhibitor/metal ratios is shown schematically in figure 1, where the x-axis reports the molar ratio between metal and inhibitor, while the y-axis reports the turbidity measured

nephelometrically.

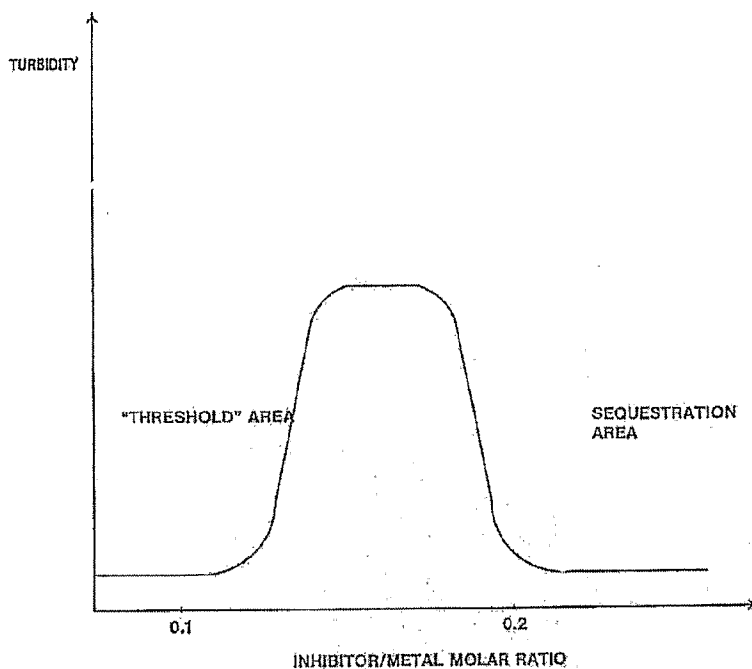


Furthermore, it is well known that it is necessary to provide for more critical recovery cycles of industrial water -- above all because of an increasing use of water resources -- in order to reduce both the quantity of water used and the environmental impact of the treatment agents.

Summary of the invention


The present invention relates to a new class of phosphonates, to a simple and economic process for the production of said new class of phosphonates and to the use of said phosphonates in water treatment applications. Therefore, the main object of the present invention is a new class of phosphonates that can be used for water treatment.

The compounds that form the object of the present invention are the derivatives of polyaminomethylenephosphonates having the following general formula:

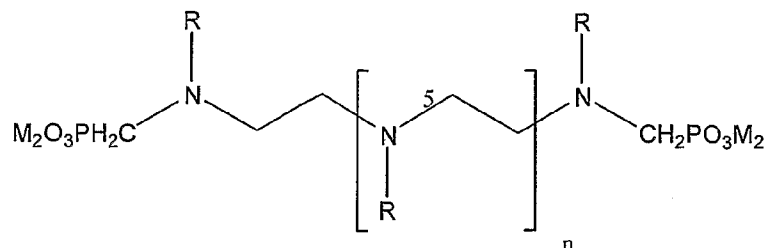


where n is an integer between 2 and 15000 preferably between 2 and 50; M_2 may be hydrogen or a suitable cation and each R group may be a $-\text{CH}_2-\text{PO}_3^{\text{M}_2}$ group or a linear or branched alkyl residue resulting from the reaction of the groups with the following reagent classes:

1)




where R^1 may be H, CH_3 , CH_2Cl , CH_2OH

2)



where R_2 is an alkyl with the number of carbon atoms between 3 and 5.

3)



where Z is a group from among: CONH_2 , CHO , COOR_3 , COOX , CN , where $R_3 = \text{CH}_3$, C_2H_5 , and where $X = \text{H}$, Na , K , NH_4 .

In Particular, the compounds that form the object of the present invention are the derivatives

of polyaminomethylenephosphonates according to the above mentioned formula where the polyamine chain may be linear or branched, and where n is an integer or fractional integer which is, or on average is, from about 2 to about 15000 : M_2 may be hydrogen or a suitable cation such as alkali metal or ammonium, and where each R group may be the same or different and is independently selected from the following classes:

1. $-\text{CH}_2\text{PO}_3\text{M}_2$ where M may be hydrogen or a suitable cation such as alkali metal or ammonium;
2. CH_2R where $\text{R} = \text{CH}_2\text{OH}; \text{CHOHCH}_3; \text{CHOHCH}_2\text{Cl}; \text{CHOHCH}_2\text{OH}$
3. $(\text{CH}_2)_n\text{SO}_3\text{M}$ where $n = 3-4$ where M may be hydrogen or a suitable cation such as alkali metal or ammonium;
4. $\text{CH}_2\text{CH}_2\text{R}$ where $\text{R} = \text{CONH}_2, \text{CHO}, \text{COOR}_1, \text{COOX}, \text{CN}$
 where $\text{R}_1 = \text{CH}_3-\text{C}_2\text{H}_5$
 where X may be hydrogen or a suitable cation such as alkali metal or ammonium

with the condition that at least one of substituent R should be different from the methylenephosphonated group (i.e.: other than $-\text{CH}_2\text{PO}_3\text{M}_2$).

A particular advantage of this new class of phosphonates, object of this invention, is that such compounds do not show "Turbidity Zone" and are therefore to be considered non Calcium-sensitive at any concentration and temperature tested; they are also effective at high pH values (>10).

This is very important since calcium tolerance of the traditional scale inhibitors like HEDP or ATMP quickly reduces with increasing the pH; in particular this is important today because water treatment processes are carried out at higher pH values than in the past. In fact, higher

pH reduces the effects of corrosion, which is more marked at lower pH.

The advantages of this new class of phosphonates, object of this invention, that can be summarised as follows:

1. Threshold Effect, typical of the phosphonates, i.e. inhibition of precipitation from solutions supersaturated with CaCO_3 and/or CaSO_4 at sub-stoichiometric concentrations of the inhibitor.
2. Non calcium-sensitivity: increases in pH and concentration of calcium strongly affect the tolerance of the standard phosphonates (HEDP, ATMP, etc.) to calcium, increasing the possibility of precipitation of poorly soluble calcium-phosphonate salts.
3. Dispersing Effect: better than the traditional phosphonates. This new class of phosphonates behaves like the acrylic polymers. They act as dispersants and deflocculants, stabilizing colloidal systems which remain steadily dispersed for long periods.
4. Corrosion Inhibition: comparable to that of the standard phosphonates.
5. Chelating Effect: comparable to that of the standard phosphonates.
6. Hydrolitic Stability: similar to conventional phosphonates

As shown in point 3) above, in addition to the threshold effect, the products object of the present invention shows high "dispersing ability".

This property became evident when the sequestering power is determined by the traditional "HAMPSHIRE " method: with this method it is not possible to identify an end-point during the titration with calcium acetate.

This property suggests a potential application of this new class of phosphonates as deflocculants, in a certain number of processes and applications where they are involved as stabilizers for different kind of dispersions like pigments (TiO_2), kaolin and drilling mud

stabilizers for different kind of dispersions like pigments (TiO₂), kaolin and drilling mud and in the industrial and domestic detergent field for their ability to disperse dirt particles. From a general point of view, thanks to their particular properties, the products according to the present invention can be used for:

- reverse osmosis system;
- scale removal;
- scale prevention and corrosion control;
- boiler cleaning;
- bottle washing;
- hard surface cleaners;
- cooling system;
- slurry dispersion;
- textile processing;
- sanitary cleaners;
- paints;
- secondary oil recovery;
- oil drilling muds;
- laundry detergents;
- industrial cleaners;
- peroxide stabilisation;
- metal finishing;
- metal cleaners;
- geothermal water;
- set retarders for concrete

- car wash;
- flash desalination.

Object of the present invention is also a simple and economic process for the preparation of the phosphonates and their utilisation in the abovesaid fields, particularly as inhibitors of the formation, deposition, and adhesion of incrustations caused by insoluble salts of alkali-earth metals, in particular Ca^{++} , Mg^{++} , on metal surfaces of aqueous systems (cooling towers, boilers, gas scrubbers etc.)

The compounds object of this invention is prepared by phosphonomethylation reaction of polyamine or mixtures of polyamines, by means of the Mannich reaction illustrated hereunder.



The phosphonomethylation reaction of amines according to Mannich is described in the literature, eg: K. Moedritzer and R. Irani, J. Organic. Chem. 31 (5) 1603-7: any relevant reference is to be considered mentioned herein to fully complete the invention specifications.

A typical procedure provides for the amine to be slowly added to a mixture of phosphorous acid and hydrochloric acid. The reaction mixture thus obtained is heated to reflux with addition of formaldehyde. The reaction time can vary from 1 to 5 h.

The derivatives of the polyaminomethylenephosphonate object of this invention are added to the aqueous systems in quantities between 2 and 50 mg/l in order to inhibit precipitation, deposition and adhesion of scale, especially CaCO_3 .

The expression "inhibits precipitation and formation of deposits" includes threshold effect, dispersion, solubilization or modification of the precipitate's morphology. The expression "inhibits the adhesion" defines just that scale is easily removed e.g. by simple washing/rinsing and not by mechanical or chemical treatment, not being the incrustation strongly bonded to the surface to which it adheres.

The term "scale" includes incrustation formed by CaCO_3 , CaSO_4 , BaSO_4 deposit and can be extended in a generalized manner to all low-solubility salts of several cations (Mg, Fe, etc.).

The term "aqueous systems" refers to industrial and/or commercial systems that use water in heat-exchange processes and includes cooling towers, boilers, desalination systems, gas scrubbers; furthermore, processes of desalination by Reverse Osmosis (RO) are included.

Of particular importance are systems operating in severe conditions such as high pH and high concentrations of calcite (CaCO_3). The preparation and the application of the polyaminomethylenephosphonate derivatives object of the present invention are illustrated in the following examples, which clarify their applications, without however limiting the scope.

Example 1

Into a suitable reaction vessel 350-g of triethylenetetramine were charged; thereafter the reaction mixture was heated at $90^\circ\div 95^\circ\text{C}$.

Ethylene oxide was then added stepwise at such a rate that, with external cooling applied, the temperature did not exceed 100°C .

211 g of ethylene oxide had been added over a period $1\frac{1}{2}$ hours. The resultant product was then converted in the phosphonomethylated derivatives according to Mannich's reaction.

With the same synthetic path is possible to obtain β hydroxyethyl derivatives of linear or branched polyamines or mixture of them in a right ratio. Other compounds of these invention can be prepared according to the procedure above describe using propylene oxide instead of

ethylene oxide (β hydroxy propyl derivatives).

Example 2

Into a suitable reaction vessel 292 g of triethylenetetramine were charged.

Under stirring acrylonitrile was then added stepwise at such a rate that, with external cooling applied, the temperature did not exceed 50°C.

212 g of acrylonitrile had been added over a period 2 hours. The resultant product was then converted in the phosphonomethylated derivatives according to Mannich's reaction.

With the same synthetic path is possible to obtain β cyanoethyl derivatives of linear or branched polyamines or mixture of them in a right ratio.

Example 3

Into a suitable reaction vessel 292 g of triethylenetetramine were charged

Under stirring 488 g of 1,3-propane sultone, dissolved in 1140 g of methanol, was added dropwise at a temperature between 40°-50°C. After 2 hours, the methanol was removed by evaporation to dryness and the residue dissolved in water. The resultant product was then converted in the phosphonomethylated derivatives according to Mannich's reaction.

With the same synthetic path is possible to obtain N-(sulfo propane)amino derivatives of linear or branched polyamines or mixture of them in a right ratio.

Other compounds of these invention can be prepared according to the procedure above describe using epichlorohydrin or other different oxiranes derivatives instead of 1,3 propane sultone.

Example 4

Into a suitable reaction vessel 234 g of compound of example 1 were added to a 70% phosphorous acid solution (478 g) and 32% of hydrochloric acid (342 g). The mixture thus obtained was heated to reflux, 340 g of 37% aqueous formaldehyde solution was added

phosphorous acid solution (478 g) and 32% of hydrochloric acid (342 g). The mixture thus obtained was heated to reflux, 340 g of 37% aqueous formaldehyde solution was added dropwise in the course of ca 1 hr and the reaction mixture was kept at reflux temperature for 1 additional hr. 300 g volatiles substances was then removed from the reaction mixture by distillation. The final product obtained was a viscous fluid having an active substance of 50%. Infrared analysis of the product showed the presence of methylenephosphonic amine groups, while P^{31} NMR analysis indicate that at least 90% of the amine groups had been phosphonomethylated. The impurities include unreacted phosphorous acid, phosphoric acid and other unidentified compounds.

By following the same synthetic method it is possible to obtain phosphonomethylated derivatives of polyamine or mix of polyamine having R group selected from the following class:

1. $CH_2PO_3M_2$ where M may be hydrogen or a suitable cation such as alkali metal or ammonium;
2. CH_2R where R = CH_2OH ; $CHOHCH_3$; $CHOHCH_2Cl$; $CHOHCH_2OH$
3. $(CH_2)_nSO_3M$ where $n = 3-4$ where M may be hydrogen or a suitable cation such as alkali metal or ammonium;
4. CH_2CH_2R where $WR = CONH_2, CHO, COOR_1, COOX, CN$
 where $R_1 = CH_3 + C_2H_5$
 where X may be hydrogen or a suitable cation such as alkali metal or ammonium.

Where preferably at least one or more than one substituent R is different from the methylenephosphonated group.

Example 5

Threshold Effect on $CaCO_3$ at pH = 10, T = 70°C, 100ppm of $CaCO_3$

The method describes the procedure for the determination of the Threshold Effect, that is the ability of a dispersing agent, present in substoichiometric amounts, to inhibit the precipitation of solutions supersaturated with calcium carbonate in deionized water.

This method measures the efficiency of a dispersant by titration of the Calcium ion remaining in a solution supersaturated with CaCO_3 respectively before and after treatment in an oven at 70 °C. The greater the calcium concentration after the period in the oven, the greater the efficiency of the dispersant in preventing precipitation of CaCO_3 .

Increasing substoichiometric amounts of phosphonate are dissolved in solutions containing $[\text{Ca}^{++}]$ and $[\text{CO}_3^{--}]$ obtained by mixing proper CaCl_2 and Na_2CO_3 solutions.

The precipitation of calcium carbonate is measured by titration of the filtered solution. The results obtained are summarised in table 1.

Table 1

Operating Conditions:
100 ppm CaCO_3 ; pH = 10; T = 70°C; 24 h
Inhibition %

Inhibitor	0,25 ppm	0,5 ppm	1 ppm
Example 4	72	97	99
HEDP	74	99	100
ATMP	75	99	100
DTPMP	65	85	100
PBTC	90	100	100

HEDP = Hydroxy-ethylidene-1,1-diphosphonic Acid

ATMP = Amino-tris Methylenephosphonic Acid

DTPMP = Diethylenetriamine penta (methylenephosphonic acid)

PBTC = Phosphono Butane tris Carboxylic Acid

Example 6

CaCO_3 Threshold Effect at pH = 11.5, T = 40°C, 400ppm of CaCO_3

Following the method described in example 5, the following results were obtained:

Table 2

Operating Conditions:
400 ppm CaCO_3 ; pH = 11,5; T = 40°C; 24 h

Inhibition %

Inhibitor	40 ppm	80 ppm	200 ppm	400 ppm	450 ppm
Example 4	0	35	90	92	95
ATMP	0	35	40	60	65
DTPMP	0	35	83	80	80
PBTC	0	30	42	92	95

Example 6

CaSO_4 Threshold Effect at pH = 7; T = 70°C; 6800ppm of CaSO_4

Following the method described in example 5. In the specific case the solution of CaSO_4 was prepared starting from CaCl_2 and Na_2SO_4 . The results obtained are hereunder summarised :

Table 3

Operating Conditions:
6800 ppm CaSO_4 ; pH = 7; T = 70°C; 24 h

Inhibition %

Inhibitor	0,5 ppm	1 ppm	2 ppm	5 ppm	10 ppm
Example 4	10	10	90	100	100
DTPMP	10	22	75	95	100

Example 7

CaSO_4 Threshold Effect at pH = 7; T = 70°C; 6800ppm of CaSO_4 + 6000 ppm of Ca^{++}

Following the method described in example 4. In the specific case the solution of CaSO_4 was prepared starting from CaCl_2 and Na_2SO_4 .

The results obtained are summarised in table 4.

Table 4

Operating Conditions:

6800 ppm CaSO_4 + 6000 ppm di Ca^{++} ; pH = 7; T = 70°C; 24 h

Inhibition %

Inhibitor	2 ppm	5 ppm	10 ppm
Example 4	15	91	99
DTPMP	22	45	96

Example 8 CaSO_4 Threshold Effect at pH = 7; T = 90°C; 6800ppm of CaSO_4

Following the method described in example 5. In the specific case, the solution of CaSO_4 was prepared starting from CaCl_2 and Na_2SO_4 . The results obtained are summarised in table 5.

Table 5

Operating Conditions:

6800 ppm CaSO_4 ; pH = 7; T = 90°C; 24 h

Inhibition %

Inhibitor	0,5 ppm	1 ppm	2 ppm	5 ppm	10 ppm
Example 4	0	5	18	85	99
DTPMP	0	0	5	73	90

Example 9 CaSO_4 Threshold Effect at pH = 7; T = 90°C; 6800ppm of CaSO_4 + 6000 ppm of Ca^{++}

Following the method described in example 5. In the specific case, the solution of CaSO_4 was prepared starting from CaCl_2 and Na_2SO_4 . The results obtained are summarised in table 6.

Table 6

Operating Conditions:

6800 ppm CaSO_4 + 6000 ppm di Ca^{++} ; pH = 7; T = 90°C; 24 h
Inhibition %

Inhibitor	0,5 ppm	1 ppm	2 ppm	5 ppm	10 ppm
Example 4	10	15	18	91	99
DTPMP	0	0	8	38	45

Calcium-Sensitivity

Example 10

The Grace "CLOUD POINT TEST" was used for testing the calcium-sensitivity. This simple method allows calcium-sensitivity to be verified visually by estimating the turbidity point of an inhibitor solution in a concentrated calcium solution. The inhibitor is added at increasing amounts to hard water having the following characteristics: 500 ppm of Ca^{++} (as CaCl_2), pH = 8.3 (0.05 M of Boric buffer), at a temperature of 60°C and 100°C for 24 h.

The turbidity of solutions after 24 hours was observed. The observation confirms that the turbidity is greater at increasing amounts of inhibitor. The results obtained are summarised in table 7 and 8.

Table 7

500ppm CaCO_3 ; pH = 8,3; T = 60°C

Inhibitor Dose

Inhibitor	10 ppm	30 ppm	50 ppm	100 ppm
Example 4	clear	clear	clear	clear
ATMP	clear	turbid	precipitate	precipitate

Table 8

500ppm CaCO_3 ; pH = 8,3; T = 100°C

Inhibitor Dose

Inhibitor	10 ppm	30 ppm	50 ppm	100 ppm
Example 4	clear	clear	clear	clear
AMTP	precipitate	precipitate	precipitate	precipitate

Fe³⁺ Sequestering

Example 11

The measurement of the sequestering power of iron is difficult both for traditional phosphonates and for polyaminomethylenephosphonate derivatives, object of this invention: both products have considerable dispersing ability and if we consider the colloidal aspect of the ferric hydrate it is clear how difficult it could be to distinguish between the dispersed iron and the iron effectively sequestered; it is well known that a very fine dispersion is very similar to a solution. It must be said that often in practical applications an effective dispersion as useful as a true sequestration.

The method consists in the addition a known quantity of solution of ferric ions to an aqueous solution of inhibitor at constant pH. After 24 hours under agitation the aspect of the sample is evaluated. The samples where a precipitate is present after 24 hours of agitation are considered “precipitated” and so the first clear sample has been considered in order to attribute a sequestring value. The results obtained are summarised in table 9.

Table 9

Fe³⁺ Sequestering Power expressed as mg Fe³⁺ / g of product

Inhibitor	pH = 5	pH = 6	pH = 7	pH = 8	pH = 9	pH = 10	pH = 11	pH = 12
Example 4	0	60	180	200	260	360	200	20
HEDP	240	280	320	360	800	800	1200	1200
ATMP	40	60	100	120	140	180	120	0

DTPMP	40	60	80	140	220	130	60	20
-------	----	----	----	-----	-----	-----	----	----

These data should be carefully evaluated because the method utilised does not allow dispersion to be distinguished from true chelation; however, internal comparison indicate that traditional phosphonates and the derivatives object of the present invention are equally effective in the control of ferric ion.

Corrosion Inhibition

The corrosion of metal equipment is an almost universal problem for aqueous systems: on a metal surface two distinct areas coexist, anode and cathode, which in practice may be situated very close to each other and set up an electrical circuit with consequent Redox reactions leading to the solubilization of the metals. In particular iron surfaces are transformed into water-soluble $\text{Fe}^{2+/3+}$ ions. The corrosion, and therefore the loss of metal from part of the structure, takes place only in the anodic zone.

Without entering into the detail of the corrosion phenomenon, it is clear, however, that the damage caused by corrosive phenomena can be considerable in extent. Various methodologies and various products have been developed in the time to solve the problems related to the entity and various origins of the corrosive phenomena. One of the more widespread methodologies involves the use, in aqueous phase, of suitable "corrosion inhibitors". These compounds which can be organic or inorganic films or protective barriers between the metal surface and the of corrosion medium. This protective film formed can be:

- 1.1. *Precipitation* of inhibitor onto the metal surface
- 2.2. *Passivation* of the metal surface
- 3.3. *Adsorption* of inhibitor onto the metal surface through the electronic lone pair of some donor elements (N, S, O, P).

Example 12

In the following example a simple test is described for the evaluation of the efficiency of the compounds object of this invention as corrosion inhibitors. The operating conditions and the procedure used in the test are indicated below:

Take a water with 30 French degrees of hardness, brought it at pH = 8.5 with diluted NaOH and than add the desired quantity of inhibitor.

Add carefully cleaned and weighed steel coupons to the solution.

The test lasts 5 days with a constant airflow bubbled through the solution.

After 5 days, weigh the test pieces and the loss in weight is estimate.


The results obtained are summarised in the following table:

Table 10

Inhibitor	% weight loss after 5 days
Example 4	0,25
ATMP	0,45
HEDP	0,3
Blank	0,7


CLAIMS

- 1) Polyaminomethylenephosphonate derivatives, useful to carry out water treatments, of general formula

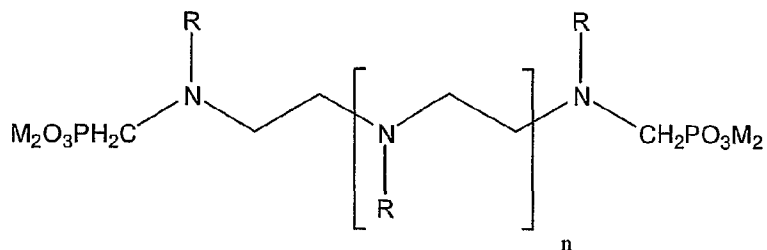


where n is between 2 and 15000; M_2 can be hydrogen or a suitable cation and each R group can be a $-\text{CH}_2\text{PO}_3\text{M}_2$ group, or linear or branched alkyl residue resulting from the reaction of the terminal amine groups with the following reagent classes:

1.




where R_1 can be H, CH_3 , CH_2Cl , CH_2OH .

2.



where R_2 is an alkyl with a carbon atom number between 3 and 5,

3.



where Z is a group chosen from: CONH_2 , CHO , COOR , COOX , where $R = \text{CH}_3$, C_2H_5 , and
where $X = \text{H}$, Na , K , NH_4 .

2) Polyaminomethylenephosphonate derivatives according to the preceding claim wherein n is preferably between 2 and 15000, and each R group, being the same or different, is independently selected from the following classes:

1. $\text{CH}_2\text{PO}_3\text{M}_2$ where M may be hydrogen or an suitable cation such as alkali metal or ammonium;
2. CH_2R con $\text{R} = \text{CH}_2\text{OH}$; CHOHCH_3 ; CHOHCH_2Cl ; CHOHCH_2OH
3. $(\text{CH}_2)_n\text{SO}_3\text{M}$ con $n = 3\div 4$ where M may be hydrogen or a suitable cation such as alkali metal or ammonium;

4. $\text{CH}_2\text{CH}_2\text{R}$ con $\text{R} = \text{CONH}_2, \text{CHO}, \text{COOR}_1, \text{COOX}, \text{CN}$

con $\text{R}_1 = \text{CH}_3 \div \text{C}_2\text{H}_5$

where X may be hydrogen or a suitable cation such as alkali metal or ammonium.

With the premise that at least one of substituent R always is different from $\text{CH}_2\text{PO}_3\text{M}_z$.

3) Polyaminomethylenephosphonate derivatives according to claim 2 wherein also at least one of the terminal $\text{CH}_2\text{PO}_3\text{H}_2$ moieties are substituted by one of the moieties under the above points 1 to 4.

4) Process for the preparation of the polyaminomethylenephosphonate derivative according to claims 1 or 2, comprising phosphonomethylation of polyamine derivatives by means of Mannich reaction.

5) Use of polyaminomethylenephosphonate derivative according to Claim 2 as scale inhibitors.

6) Use of polyaminomethylenephosphonate derivative according to Claim 2 as sequestrating agents.

7) Use of polyaminomethylenephosphonate derivative according to Claim 2 as corrosion inhibitors.

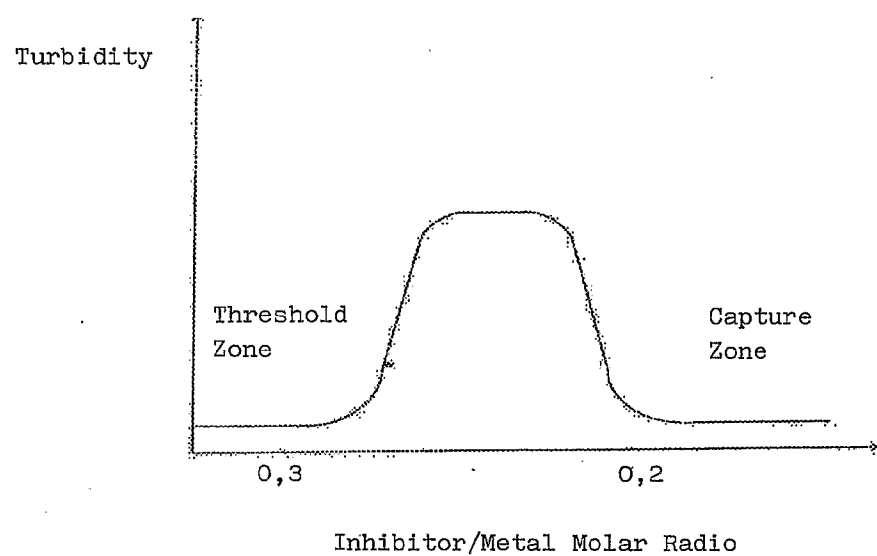


Figure 1

INTERNATIONAL SEARCH REPORT

Inter al Application No
PCT/IT 03/00420

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C07F9/38 C08G73/04 C02F5/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C07F C02F C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 479 462 A (BRITOL PLC) 8 April 1992 (1992-04-08) the whole document ---	1
X	WO 01 79215 A (THE DOW CHEMICAL CO.) 25 October 2001 (2001-10-25) the whole document --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 November 2003

Date of mailing of the international search report

17/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Beslier, L

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00420

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CHEMICAL ABSTRACTS, vol. 132, no. 5, 31 January 2000 (2000-01-31) Columbus, Ohio, US; abstract no. 54509, WANG, RUI ET AL: "(HO)2OPCH2{N'CH2PO(OH)2!CH2CH2}nN'CH2PO(O H)2!2" XP002228000 abstract & ZHONGGUO FUSHI YU FANGHU XUEBAO (1999), 19(5), 273-279, 1999, ---	1
X	EP 0 628 518 A (MONSANTO EUROPE S.A.) 14 December 1994 (1994-12-14) claim 1 ---	1
X	EP 0 282 260 A (THE DOW CHEMICAL CO.) 14 September 1988 (1988-09-14) the whole document ---	1
X	GB 2 244 050 A (BAKER HUGHES INC.) 20 November 1991 (1991-11-20) the whole document ---	1
X	GB 1 392 044 A (CIBA-GEIGY AG) 23 April 1975 (1975-04-23) the whole document ---	1
X	SOVIET INVENTIONS ILLUSTRATED Section Ch, Week 7941, 21 November 1979 (1979-11-21) Derwent Publications Ltd., London, GB; Class A91, Page 12, AN 75036b XP002228001 & SU 643 177 A (ENERGOTSVETMET), 25 January 1979 (1979-01-25) abstract ---	1
Y	FRIGERIO, M. ET AL: "Sequestering agents in dyeing and printing" TINCTORIA (1987), 84(3), 57-64 , 1987, XP008024344 the whole document ---	1-7
Y	US 4 085 134 A (DEREK REDMORE) 18 April 1978 (1978-04-18) examples 14,15 ---	1-7
Y	US 4 187 245 A (DEREK REDMORE) 5 February 1980 (1980-02-05) examples 18,19 -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00420

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 479462	A	08-04-1992	AT 129989 T	15-11-1995
			CA 2052732 A1	05-04-1992
			DE 69114436 D1	14-12-1995
			DE 69114436 T2	20-06-1996
			EP 0479462 A1	08-04-1992
			NO 913861 A	06-04-1992
			US 6527983 B1	04-03-2003
			US 5261491 A	16-11-1993
WO 0179215	A	25-10-2001	AU 5710001 A	30-10-2001
			EP 1276744 A1	22-01-2003
			WO 0179215 A1	25-10-2001
EP 628518	A	14-12-1994	EP 0629585 A1	21-12-1994
			US 5490942 A	13-02-1996
			EP 0628518 A1	14-12-1994
			AT 205460 T	15-09-2001
			CA 2124599 A1	15-12-1994
			DE 69428230 D1	18-10-2001
			DE 69428230 T2	27-06-2002
			DK 628518 T3	17-12-2001
			ES 2163427 T3	01-02-2002
			FI 942799 A	15-12-1994
			JP 7016597 A	20-01-1995
			NO 942205 A	15-12-1994
EP 282260	A	14-09-1988	US 4872996 A	10-10-1989
			AU 609455 B2	02-05-1991
			AU 1274088 A	15-09-1988
			CA 1326429 C	25-01-1994
			DE 3868088 D1	12-03-1992
			DK 137288 A	14-09-1988
			EP 0282260 A2	14-09-1988
			FI 881162 A	14-09-1988
			JP 63242399 A	07-10-1988
			KR 9600311 B1	04-01-1996
			NO 881090 A ,B,	14-09-1988
			ZA 8801765 A	29-11-1989
GB 2244050	A	20-11-1991	US 5057228 A	15-10-1991
			CA 2040179 A1	17-10-1991
			NO 911459 A	17-10-1991
			US 5207919 A	04-05-1993
GB 1392044	A	23-04-1975	AU 4378572 A	03-01-1974
			CA 976337 A1	21-10-1975
			DE 2231206 A1	28-12-1972
			FR 2143761 A1	09-02-1973
			JP 53006626 B	09-03-1978
			NL 7208694 A	28-12-1972
			US 3925245 A	09-12-1975
			US B265369 I5	28-01-1975
SU 643177	A	25-01-1979	SU 643177 A1	25-01-1979
US 4085134	A	18-04-1978	NONE	
US 4187245	A	05-02-1980	NONE	